KEMOTRONICS®


OPEN THE WORLD OF LIGHT
UNLIMITED INNOVATION

THREE PROOFINGS LAMP SERIES

KM-TPL02-SERIES




IP66

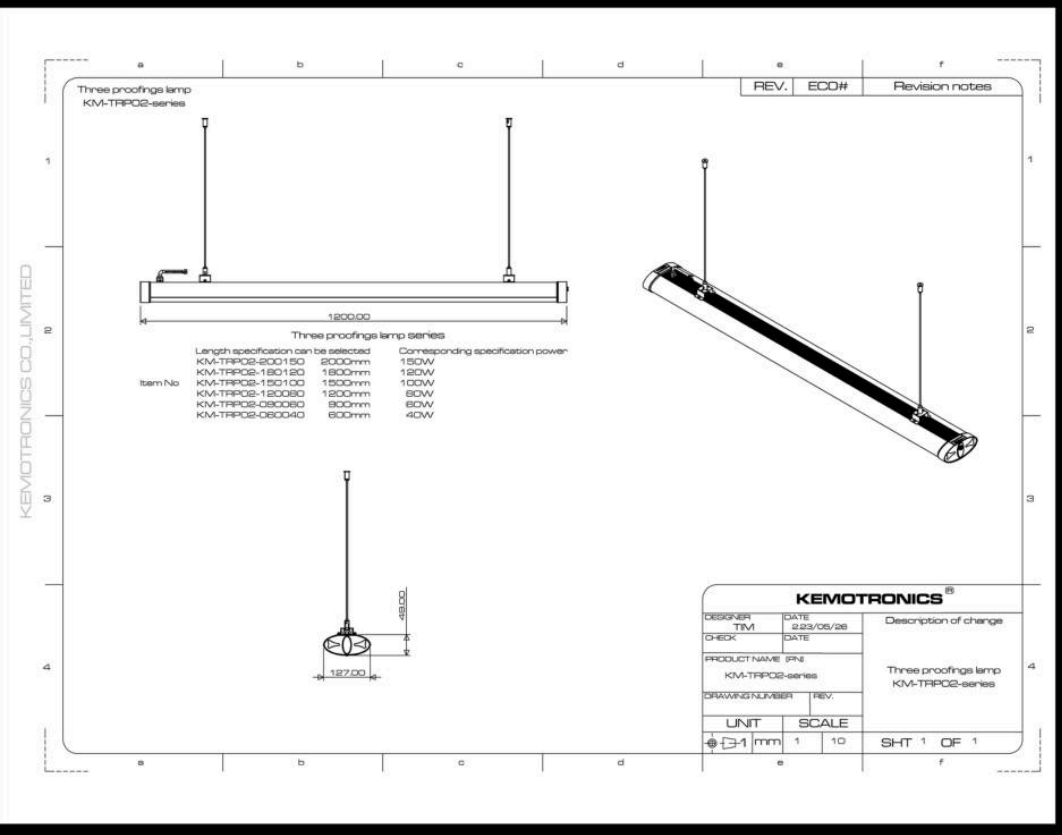





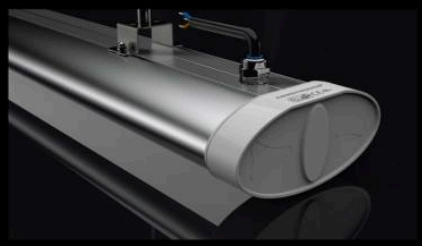

Part No.	Product color	lens	Lighting Angle	install	Input Voltage	Work Frequency	Dimension	LED Type	Power consumption	Color Temperature	Luminous flux(LM)	Color Index(Ra)	Power Factor	Work Temp	Life span	IP Rate	Warranty	size	notes
KM-TPL02-200150	white	extrusion	120°	Hanging installation	AC100-240V	50-60HZ	2000mm diameter	SMD2835	150W	3000K~6000K	15000	>80	>0.90	-30℃~50℃	50K hours	IP66	5 years	200*12.7*4.9CM	
KM-TPL02-180120	white	extrusion	120°	Hanging installation	AC100-240V	50-60HZ	1800mm diameter	SMD2835	120W	3000K~6000K	12000	>80	>0.90	-30℃~50℃	50K hours	IP66	5 years	180*12.7*4.9CM	
KM-TPL02-150100	white	extrusion	120°	Hanging installation	AC100-240V	50-60HZ	1500mm diameter	SMD2835	100W	3000K~6000K	10000	>80	>0.90	-30℃~50℃	50K hours	IP66	5 years	150*12.7*4.9CM	
KM-TPL02-120080	white	extrusion	120°	Hanging installation	AC100-240V	50-60HZ	1200mm diameter	SMD2835	80W	3000K~6000K	8000	>80	>0.90	-30℃~50℃	50K hours	IP66	5 years	120*12.7*4.9CM	
KM-TPL02-090060	white	extrusion	120°	Hanging installation	AC100-240V	50-60HZ	900mm diameter	SMD2835	60W	3000K~6000K	6000	>80	>0.90	-30℃~50℃	50K hours	IP66	5 years	90*12.7*4.9CM	
KM-TPL02-060040	white	extrusion	120°	Hanging installation	AC100-240V	50-60HZ	600mm diameter	SMD2835	40W	3000K~6000K	4000	>80	>0.90	-30℃~50℃	50K hours	IP66	5 years	60*12.7*4.9CM	

KEMOTRONICS CO.,LIMITED

>>> LEARN MORE WWW.KEMOTRONICS.COM E-MAIL: JEFF@KEMOTRONICS.COM SKYPE : JEFFRY1984